

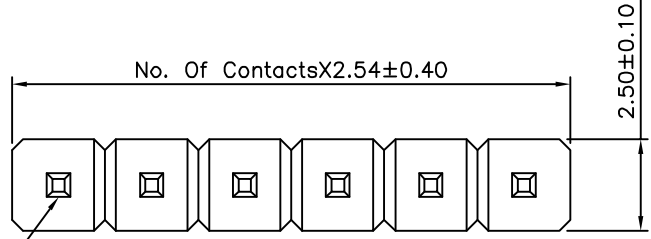


Recommended P.C.B. Layout

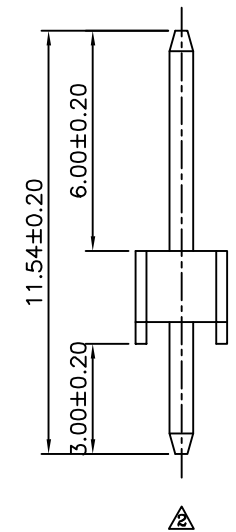

Pin 1

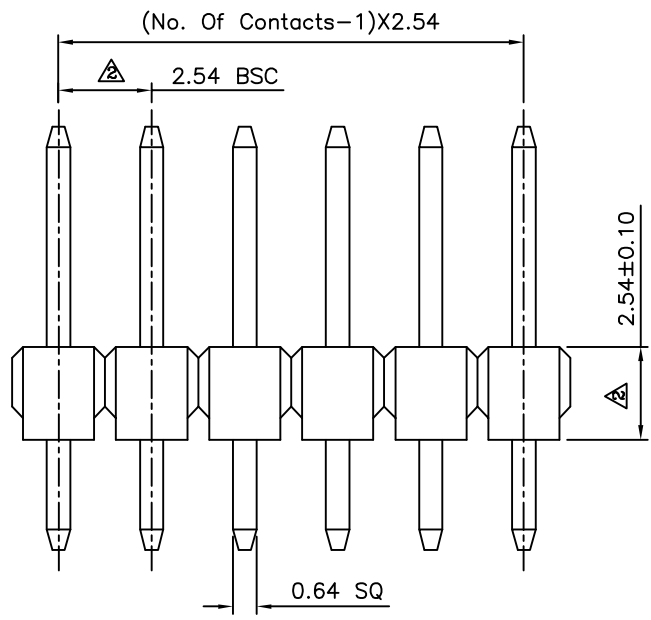

△△ SPECIFICATION

Current:3A
 Operation Temperature:-55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Housing:PBT(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
00820		MEI		
		CHECKED BY	HZF	
		DRAWING BY	QQJ	
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	11/01/2010
△1	A1	Modify SPECIFICATION	SHIN	04/26/2007
△0	A0	NEW RELEASE	SHIN	03/06/2006